

Perfect Solutions for Flow Components



**PRODUCT SUMMARY**



## TRUNNION BALL VALVE

API 6A, API 6D, API 608, ISO 17292, API 607



- **Size** 2" ~ 48"
- **Rating** 150lb ~ 2500lb, 5000psi
- **Materials** Casting & Forging
- **Configuration** Unibody, Side Entry Ball
- **Applications** Oil & Gas Distribution, Oil & Gas Pipeline, Oil & Gas Production, Petrochemical Plant

Fire Safe Tested & Certificated / Double Block & Bleed / Sealant Injection / Anti-Static Device / Optional Double Piston Design

## FLOATING BALL VALVE

API 6D, API 608, ISO 17292, API 607




- **Size** 1/4" ~ 10"
- **Rating** 150lb ~ 600lb
- **Materials** Casting & Forging
- **Configuration** Unibody, Split Body
- **Applications** Chemical, Petrochemical, Oil & Gas, Pulp & Paper

Fire Safe Tested & Certified / Blow-Proof Stem / Anti-Static / Double Sealing Design

## METAL SEATED BALL VALVE

API 6A, API 6D, ISO 17292, API 607



- **Size** 1/4" ~ 48"
- **Rating** 150lb ~ 2500lb, 5000psi
- **Materials** Casting & Forging
- **Configuration** Floating or Trunnion Supported
- **Hard Coating** ENP, Chrome Carbide, Tungsten Carbide, NiBr
- **Applications** High Temperature, Severe Service

## THREADED & SOCKET WELDED BALL VALVE

ANSI, KS



- **Size** 1/2" ~ 2"
- **Rating** 1000 WOG
- **Materials** Casting & Forging
- **Configuration** 1-Piece, 2-Piece, 3-Piece
- **Applications** Chemical, Petrochemical, Natural Gas, Electric Power, Sanitary Service

## TOP ENTRY BALL VALVE

API 6A, API 6D, API 608, ISO 17292, API 607



- **Size** 2" ~ 48"
- **Rating** 150lb ~ 2500lb
- **Materials** Casting
- **Configuration** Unibody, Top Entry Ball
- **Applications** Oil & Gas Distribution, Oil & Gas Pipeline, Oil & Gas Production, Petrochemical Plant

Fire Safe Tested & Certificated / Double Block & Bleed / Sealant Injection / Anti-Static Device / Optional Double Piston Design

## CRYOGENIC BALL VALVE

API 6D, BS 6364, Shell MESG 77/200, API 607



- **Size** 1/4" ~ 24"
- **Rating** 150lb ~ 2500lb
- **Materials** Casting & Forging / Stainless Steel
- **Configuration** Floating or Trunnion Supported
- **Applications** Liquefied Natural Gas, Gas Production Plant, Ethylene Plant, Industrial Low-Temp Gas


## AUTOMATED VALVE & SYSTEM

ANSI, KS, JIS




- **Size** 1/4" ~ 48"
- **Rating** 150lb ~ 2500lb, 5000psi
- **Materials** Casting & Forging
- **Configuration** Valve with Actuator and Accessories
- **Applications** Electric, Pneumatic, Hydraulic, Gas-Over-Oil, High-Integrity Pressure Protection System


Please refer to our catalogues and web site for more information




JMC\_TB




JMC\_FB



JMC\_TEB




JMC\_CB



JMC\_AS

www.jmcvalve.kr

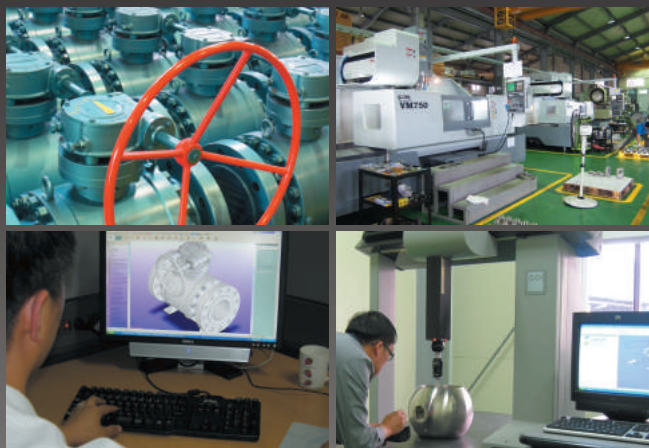

World Headquarter

**SAMJIN JMC CO., LTD**

1-31 Daehwa-Dong, Daedeok-Gu, Daejeon 306-800, Korea

Tel : 82-42-637-1100 / Fax : 82-42-639-2200

**SEOUL SALES OFFICE**

Tel : 82-2-839-0161 / Fax : 82-2-839-2272

E-MAIL : sales@jmcvalve.kr

Learn more about JMC by visiting [www.jmcvalve.kr](http://www.jmcvalve.kr)

Design improvements may subject materials & specifications to change without notice. Please refer to our web site for current products specs.